



- Self priming to 9m at sea level
- Designed specifically for rainwater tanks, shallow well, spear and boreholes to a maximum depth of 9 metres
- Ideal for drip irrigation and garden watering
- Designed for domestic and urban household pressure systems
- Electronic pump control with dry run protection and automatic restart
- 4m Plug n Play Cable

Supplied by ALLTOILETS

Liquid:

Clean water temperature range: 0 – 35 °C

Materials:

Pump body: Technopolymer
Diffuser, Impeller: Technopolymer
Mechanical seal: Carbon/ Ceramic
Wear rings: Stainless Steel

Installation:


Maximum ambient temperature: 40 °C
Maximum operating pressure: 6 bar
Pipe connections discharge: 1" BSPF / 1" BSPM

Hydraulic data:

Flows to: 45 L/m
Heads to: 42 m

Electrical data:

Rated voltage: 240V
Mains frequency: 50 Hz
Current: 3.12 amps
Capacitor: 12.5 uF
Motor duty: Continuous
Motor type: Asynchronous TEFC
Motor protection: In-built thermal overload
Ingress protection: IP 44
Insulation class: F
Power cable length: 4 m
Net weight: 9 kg
Dimensions: 406L x 122W (mm)

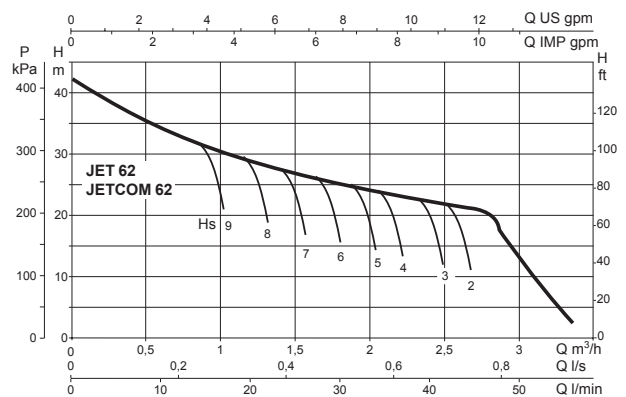

2 Year Dab Pump Warranty